

JON M. HUNTSMAN, JR. Governor

GARY R. HERBERT Lieutenant Governor

## Department of Administrative Services

KIMBERLY HOOD Executive Director

Division of Facilities Construction and Management

Director

# **ADDENDUM**

Date: 11-16-2006

To: Contractors

From: Brent Lloyd, Project Manager,

Reference: Cannon Health Building

> **Plumbing Improvements** DFCM Project. # 06140390

Subject: Addendum No.1

Pages: Addendum Cover 1 Page

> **Architects Clarifications and Drawings** 9 Pages

10 Pages

Note: This Addendum shall be included as part of the Contract Documents. Items in this Addendum apply to all drawings and specification sections whether referenced or not involving the portion of the work added, deleted, modified, or otherwise addressed in the Addendum. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

# SCHEDULE HAS NOT BEEN CHANGED

1.1 Architects Clarifications and Drawings

End of Addendum





## **Addendum**

Job: Cannon Health Building

**Job Number:** 20060357

Date: November 16, 2006

## **MECHANICAL – DIV 15**

#### **GENERAL**

1. See additional general notes on sheet PE-001-RV1-1.

#### **DRAWINGS**

#### SHEET - PD-101

1. An alternate to remove existing showers and shower valve and replace them with pressure balance valves has been added. See sheet PD-101-RV1-1.

#### SHEET - PD-102


1. The alternate to replace the water main to the water meter has been removed. See sheet PD-102-RV1-1.


#### SHEET - PL-101

- An alternate to furnish new pressure balance valves and showers has been added. A rough-in for a future outdoor drinking fountain has been added. See sheets PL-101-RV1-1 and PL-101-RV1-2
- 2. The new copper cold water main is to be run above offices as it currently does. See sheet PL-101-RV1-3.

#### SHEET - PL-102

1. The alternate to replace the water main to the water meter has been removed. The branch from the cold water main to the west riser has been shown. See sheets PL-102-RV1-1 and PL-102-RV1-2.

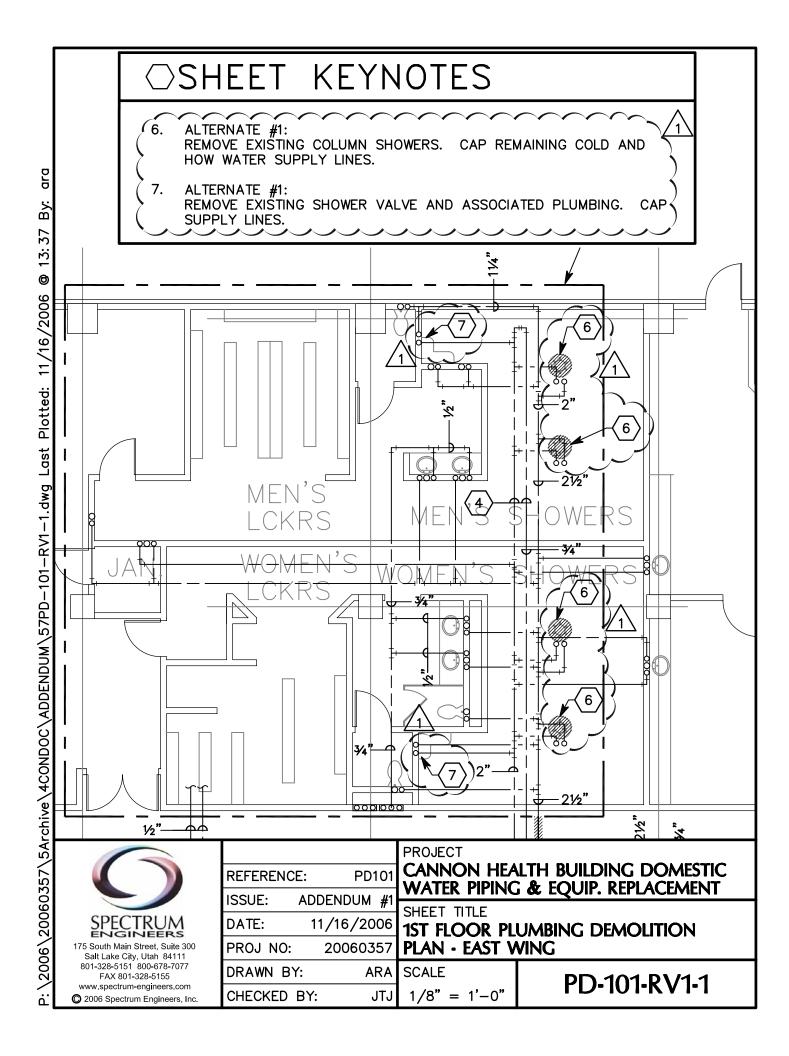

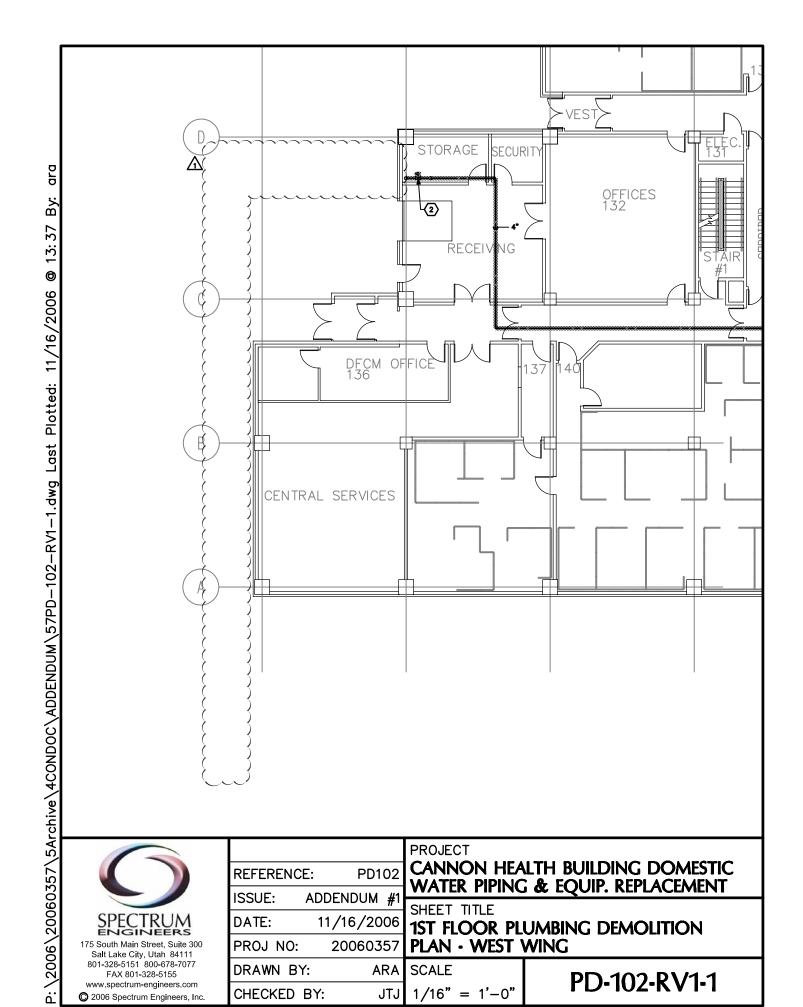

### GENERAL PLUMBING **NOTES**

35. REPLACEMENT OF ANY DAMAGED CEILING TILES OR GRID IS THE RESPONSIBILITY OF THE CONTRACTOR.

COŇSTRUČTION WORK IN NŮRŠERY, AND OFFICE AŘEAŠ MŮSŤ NŎT 36. DISRUPT BUILDING OCCUPANTS AND THEIR DAILY WORK. ANY WORK TO BE PERFORMED IN THE LOBBY NEEDS TO BE DONE AFTER HOURS.

ANY PENETRATIONS IN THE POST TENSIONED SLAB THAT ARE 37. REQUIRED MUST NOT INTERFERE WITH OR DAMAGE EXISTING TENDONS IN THE SLAB. THE SLAB MUST BE X-RAYED BEFORE MAKING PENETRATIONS.



Salt Lake City, Utah 84111 801-328-5151 800-678-7077 FAX 801-328-5155 www.spectrum-engineers.com

2006 Spectrum Engineers, Inc.

PE001 REFERENCE: ISSUE: ADDENDUM #1 DATE: 11/16/2006 PROJ NO: 20060357

DRAWN BY:

CHECKED BY:

**PROJECT** 

CANNON HEALTH BUILDING DOMESTIC WATER PIPING & EQUIP. REPLACEMENT

SHEET TITLE

PLUMBING SYMBOLS LEGEND AND GENERAL NOTES

**SCALE** 

ARA

JTJ

NO SCALE

PE-001-RV1-1

# GENERAL SHEET NOTES

- 5. PROVIDE INSULATION ON EXPOSED HOT WATER AND DRAIN LINES.
- 6. FURINSH EXPANSION JOINT.

ara

By:


@ 13:38

2: \2006\20060357\5Archive\4CONDOC\ADDENDUM\57PL-101-RV1-1.dwg Last Plotted: 11/16/2006

- 7. ALTERNATE #1:
  FURNISH NEW COLUMN SHOWERS WITH 6 HEADS PER COLUMN
  AND PRESSURE BALANCE VALVES FOR EACH HEAD: BRADLEY
  MODEL COL—6C WITH DELUXE SHOWERHEAD WITH LOCKABLE
- 8. SEE SHEET PE601 FOR RISER DIAGRAM.
- 9. ROUGH-IN COLD WATER SUPPLY FOR FUTURE DRINKING FOUNTAIN.

BALL JOINT AND ALLEN KEY VOLUME CONTROL.

10. ALTERNATE #1:
FURNISH NEW PRESSURE BALANCE VALVE ASSEMBLY:
SYMMONS SAFETYMIX 1-25-FSB WITH HANDLE TURN LIMIT,
WALL/HAND SHOWER WITH FLEXIBLE METAL HOSE, IN-LINE
VACUUM BREAKER, WALL CONNECTION AND FLANGE, AND 30"
SLIDE BAR. INSTALL COMPLIANT WITH ADA REQUIREMENTS.

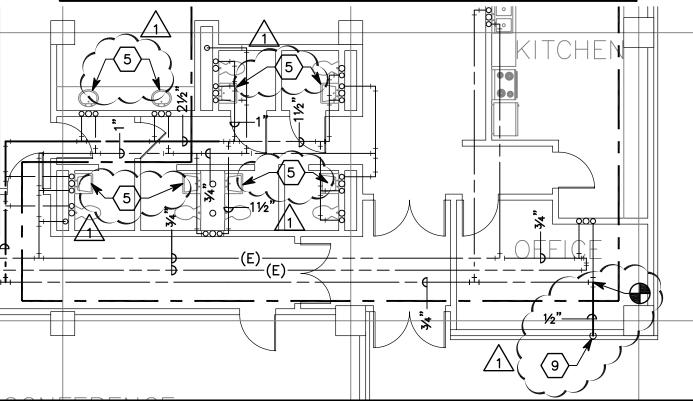



175 South Main Street, Suite 300 Salt Lake City, Utah 84111 801-328-5151 800-678-7077 FAX 801-328-5155

www.spectrum-engineers.com
© 2006 Spectrum Engineers, Inc.

REFERENCE: PL101 ISSUE: ADDENDUM #1

DATE: 11/16/2006 PROJ NO: 20060357

DRAWN BY: ARA
CHECKED BY: JTJ

PROJECT

CANNON HEALTH BUILDING DOMESTIC WATER PIPING & EQUIP. REPLACEMENT

SHEET TITLE

1ST FLOOR PLUMBING PLAN - EAST WING

SCALE 1/8" = 1'-0"

PL-101-RV1-1

